
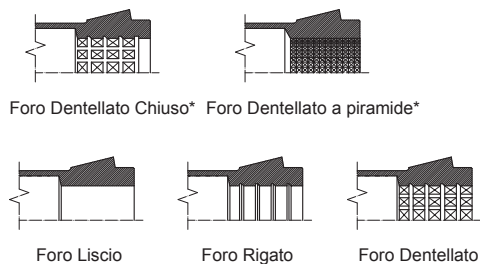


/ Pinze stringibarra Gildemeister

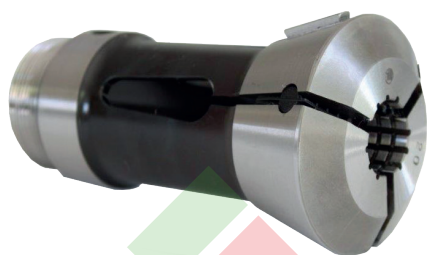

*Esecuzione su richiesta

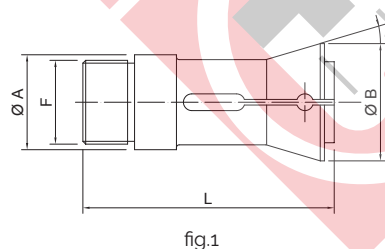


fig.1

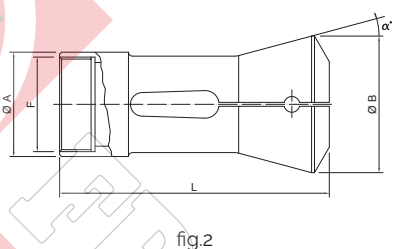


fig.2

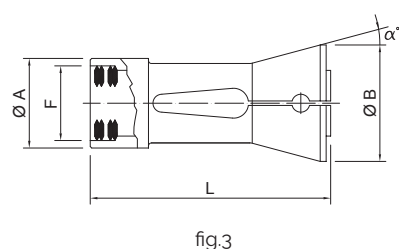


fig.3

CODICE "E"	DESCRIZIONE	FIG.	DIMENSIONI					ALESAGGIO MAX		
			A	B	L	α	FILETTO F	Tonde	Esag.	Quadre
9013E	AS12	2	26,8	34	88	15°5'	M24x1 sin.	12	11	8
9012E	AS16/20 GS/GM20	1	34	42	90	16°	M30x1 sin.	23	19	14
9017E	AS 16/20 VARIANTE 25	2	38	45,5	90	16°	M34,5x0,75 sin.	27	24	18
9023E	GM16 AC	3	30	39	80,5	15°	AtcB Ø27,12x1,5 - 60°	16	14	11
9045E	AS25	2	45	60,4	164	15°	M40x1 sin.	25	22	17
	GM26 AC	3	41	53	106	15°	AtcB Ø37x2,7 - 30°	26	22	18
	GS25	2	45	60,4	164	15°	M40x1,5 sin.	25	22	17
	GS25 VARIANTE 32	1	45	60,4	164	15°	M42x1 sin.	32	27	22
9069E	AS/GS32 GM32/35	2	53	69,4	139	15°	M48x1,5 sin.	38	31	22
9115E	AS/GS/GM42	2	64	80,5	134	15°	M59x1,5 sin.	45	40	28
9132E	AS48	2	70	90,4	167,5	15°	M65x1,5 sin.	53	45	33
9178E	AS67	2	90	115,4	183,5	15°	M85x1,5 sin.	67	58	47
9209E	AS82	2	109	138,4	201	15°	M102x1,5 sin.	82	70	57
9239E	AS100	2	128	160,4	263	15°	M122x1,5 sin.	100	87	71