

/ Pinze pickup Shutte

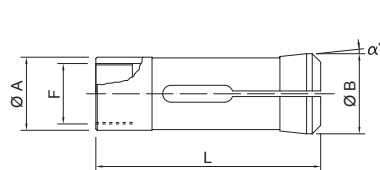
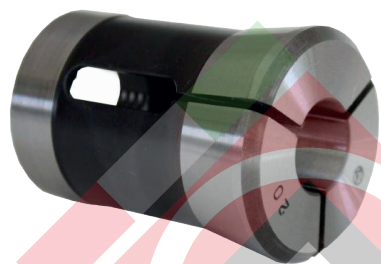


fig.1

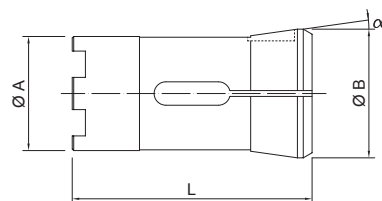


fig.3

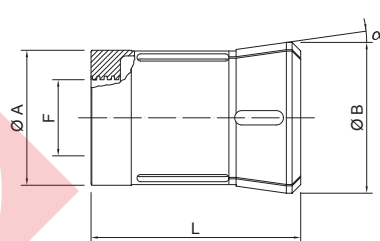


fig.2

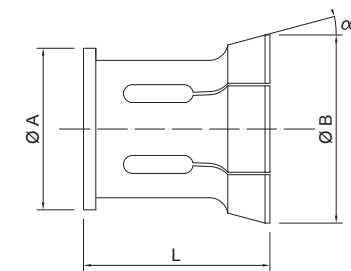


fig.4

/ Pinze pickup Shutte

CODICE	DESCRIZIONE	FIG	DIMENSIONI					ALESAGGIO MAX		
			A	B	L	α	FILETTO F	Tonde	Esag.	Quadre
C2202500	SE16	1	25	35.1	58	15°	M18x1,5 sin	18	16	13
Q2202500	SG18/AG20		25	32.1	91.5	15°10'		18,5	16	13
C0002800	SE16/SE25	1	28	32	64	8°	M24x1,5 sin	23	20	16
C2202800	SF20	1	28	36	50	15°10'	M24x1,5 sin	22	19	16
C2203200	SE25/SF26	1	32	45.1	71	15°	M22x1,5	26	23	18
Q0003550	SE25/SF26	2	35.5	41.5	80	8°10'	AtcB Ø27x2.7 - 30°	32	27	22
C0003900	SD/SF/AF32	1	39	44	90	8°	M34x1 sin	32	28	23
A2205200	AD40/SF42	4	52	60.5	60	15°15'		40	35	28
C0003900	AD40/SF42	1	39	44	90	8°	M34x1 sin	32	28	23
C0005600	AD40/SF42/SD50/SF51	1	56	60	95	8°	M51x1,5 sin	49	41	34
Q0007500	SF63	3	75	86	150	7°30'	AtcB 21x4	68	59	22
A2204400	S32PC/S36PC	4	44	54	76	15°		34	29	23