

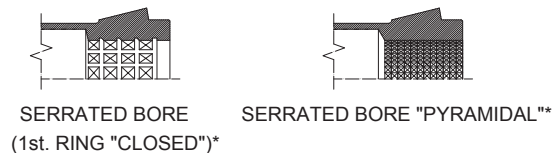


/ Schutte bar holding collets

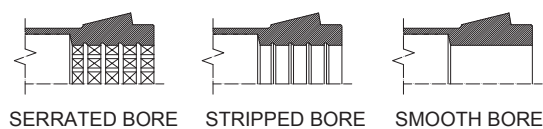

*CONSTRUCTION ON REQUEST

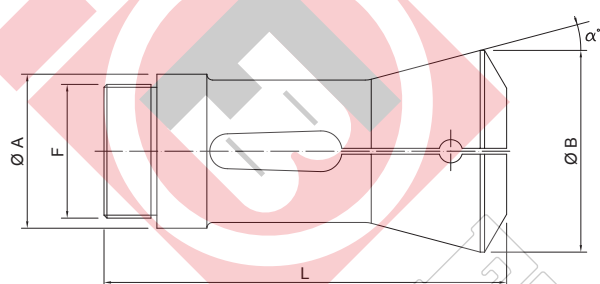

CODE "E"	DESCRIPTION	DIMENSIONS					Bore MAX		
		A	B	L	α	F Thread	Round	Hexag.	Square
9015E	SF13	25	36.1	75	15°10'	M22x1 sin	13	11	9
9007E	SE16/18	31.9	42	84	15°	M28x1 sin	18	16	13
90076H	SG18/AG20 Fil. CILINDRICO	31.9	42	84	15°	M28x1 sin	18	16	13
90078H	SG18/AG20 Fil. CONICO	32	41.5	84	15°10'	M30x1 sin. conico 1:8	21	18	14
9016E	SF20	32	41.5	84	15°	M30x1 sin	20	17	14
9039E	SD/SE25 - AF/SF26	46	60.3	120	15°	M40x1.5 sin	30	28	21
SEF0020	36PC	56	72	139	15°	M52x1.5 sinx	36	31	25
9070E	SD/SF/AF32	53	69.3	136.5	15°	M47x1.5 sin	38	32	26
9112E	AD40-SF42	62.9	78.3	157	15°	M56x1.5 sin	49	41	34
9139E	AF51-SF51-SD50	75	97.8	187	15°	M68x1.5 sin	51	44	36
9179E	SF63	90	115.3	212	15°	M82x1.5 sin	63	55	44
9187E	SF67	89.9	115.4	180	15°	M85x1.5 sin	70	63	49
9210E	SF81	109	138	241	15°	M100x1.5 sin	80	73	56