


/ PRC compensation push rod

The bar-stopping push rod is available in the warehouse either with a standard or VDI attachment.

It is lodged in the tool-holding turret: once the turret is carried the distance from the desired chuck, the bar is placed against the push rod, which absorbs the impact of the bar itself through its buffer, without setting off the machine alarm.

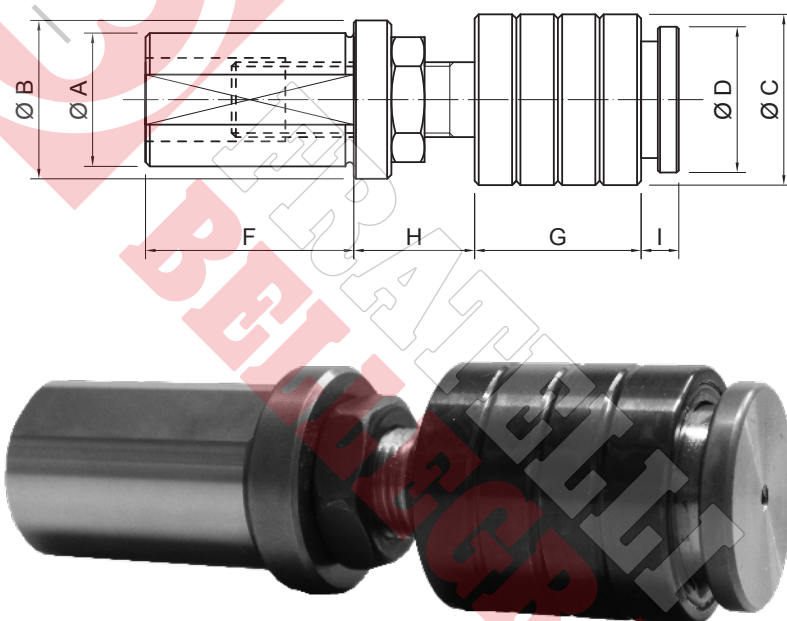

CODE	PUSH ROD TYPE	DIMENSIONS							
		A	B	C	D	F	G	H min.+max.	I
620 025 018	PRC 25	25	32	37	35	60	36	10÷50	10
620 030 018	PRC 30	30	38	37	35	60	36	10÷50	10
620 032 018	PRC 32	32	40	37	35	60	36	10÷50	10
620 035 020	PRC 35	35	43	60	60	80	60	12÷50	15
620 040 020	PRC 40	40	48	60	60	80	60	12÷50	15
620 050 020	PRC 50	50	65	60	60	80	60	12÷50	15